


OVERVIEW AUTOMATIC DOSING CONTROL “AQUA PLUS”

| A-Z | DEUTSCH | ENGLISH | FRANÇAIS | NEDERLANDS | POLISH/RUSSIA |
|-----|---|---|--|---|---------------|
| 1 | Gehäuse | Housing | Boîtier | Behuizing | |
| 2 | Wasser Menge Knopf | Water quantity knob | Bouton de réglage de l'intensité | Water hoeveelheid instelknop | |
| 3 | Indikation led "Wasser aktive" | Indication led "Water active" | Signal "Water active" | Led "Water actief" | |
| 4 | Pause Zeit Knopf | Pause time knob" | Bouton pause | Pauze tijd instelknop" | |
| 5 | Indikation led " Pause Zeit aktive" | Indication led "Pause time active | Signal "Water de pause" | Led "Water pauze tijd actief | |
| 6 | Led Std.by / input | Led Std.by / input | Signal "Std.by / input." | Led Std.by / input | |
| 7 | Anschluss Magnet Ventile und Temperatur Fühler | Connection Magnet valve and Thermostat | Câble de connexion Valve magnétique et Thermostat | Aansluiting magneetklep en Thermostat | |
| 8 | Drei Fachschalter: <i>Automatisch / Aus / Manuel</i> | Three way mode switch: <i>Automatic / Off / Manual</i> | Commutateur 3 positions <i>Automatique / Arrêt / manuel</i> | 3-standen schakelaar: <i>Automatisch / Uit / Manueel</i> | |
| 9 | Schaltnetzteil | Wall mount plug-in adapter | Cordon d'alimentation | Geschakelde net voeding | |
| 10 | Indikation led "Absperr Zeit Schaltknopf aktive" | Led lock time active | Led Verrouillage temps actif | Led "Lock tijd actief" | |
| 11 | Absperr Zeit Knopf | Lock time knob | Molette de réglage de temps de pause | Lock tijd instelknop | |
| 12 | Anschluss Kabine Schalter und led beleuchtung | Connection cabin switch and led illumination | Connexion cabine Switch et verlichting | Aansluiting Cabine Switch | |
| 13 | Kabel Temperatur Fühler | Cable temperature sensor | Capteur de température de câble | Kabel temperatuur sensor | |
| 14 | Konnektor PTFE Wasser Schlauch | Connector PTFE water tube | Tube de raccord PTFE eau | Koppeling PTFE water slang | |
| 15 | Magnet Ventile | Magnet valve | Valve magnétique | Magneetklep | |
| 16 | Kabine Schalter Beleuchtet | Cabin switch with light | Bouton avec éclairage de la cabine | Cabine Knop met verlichting | |

Fig. D

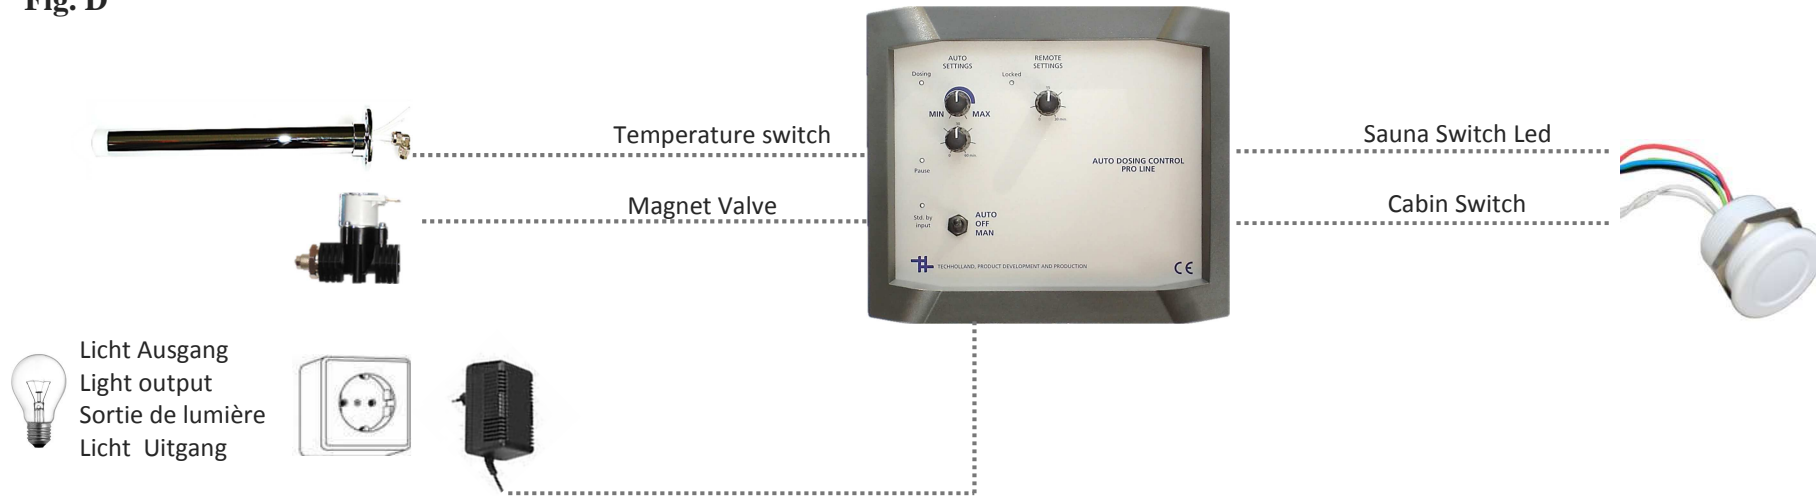

| | SUBJECT | SPECIFICATIONS |
|---|--|--|
| 1 | Max dosing time / pause time / lock time | 3 seconds / 60 minutes / 30 minutes |
| 2 | Max water quantity @ 2,5 Bar Valve | 150 Liter / per Hour (max setting 3 seconds = 150 L. / 3600 sec. = 0,0416 Liter per second x 3 sec. = 0,125 Liter Max @ 2,5 Bar! |
| 3 | Max valve pressure Bar / Mpa | Max 10 Bar / 1,0 Mpa |
| 4 | Operating humidity | Max 20% – 80% (no condensation fluid) |
| 5 | Power input / Working voltage | 230 Volt AC / 24 Volt DC |
| 6 | Amperage standby / active | 0,20 – 1 Amp @ 24 Volt DC |
| 7 | Certification | CE (power supply adapter CE, TUV, GS) |